

519,161

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
8 January 2004 (08.01.2004)


PCT

(10) International Publication Number  
**WO 2004/002727 A1**

- (51) International Patent Classification<sup>7</sup>: **B31F 1/07**
- (21) International Application Number:  
PCT/IT2003/000377
- (22) International Filing Date: 19 June 2003 (19.06.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
FI2002A00113 26 June 2002 (26.06.2002) IT
- (71) Applicant (for all designated States except US): **FABIO PERINI S.p.A.** [IT/IT]; Zona Ind.le P.I.P. Mugnano Sud, I-55100 Lucca (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BIAGIOTTI, Guglielmo** [IT/IT]; Via di Vorno, 105, I-55060 Capannori (IT).
- (74) Agents: **MANNUCCI, Michele** et al.; Uff. Tecn. Ing. A. Mannucci S.r.l, Via della Scala, 4, I-50123 Firenze (IT).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: EMBOSsing AND LAMINATING MACHINE WITH INTERCHANGEABLE EMBOSsing CYLINDERS ASSEMBLY

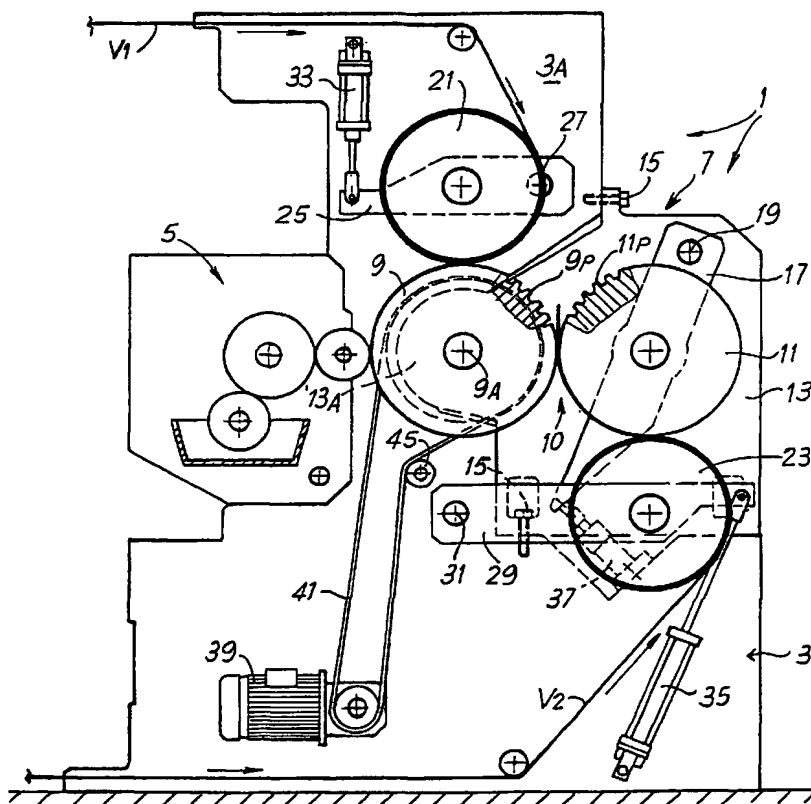

(57) Abstract: The embossing and laminating device comprises: a supporting structure (3); a first embossing cylinder (9) provided with protuberances (9P); a first pressure roller (21) cooperating with said first embossing cylinder (9); a second embossing cylinder (11), provided with protuberances (11P); a second pressure roller (23) cooperating with said second embossing cylinder (11). The first and the second embossing cylinder (9, 11) are carried by an interchangeable assembly or sub-structure (7), which can be mounted on and removed from the fixed structure.

WO 2004/002727 A1

WO 2004/002727 A1



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

- 1 -

## Embossing and laminating machine with interchangeable embossing cylinders assembly

### Description

#### Technical field

5           The present invention relates to an embossing and laminating device, of the type comprising: a supporting structure; a first embossing cylinder provided with protuberances; a first pressure roller cooperating with said first embossing cylinder; a second embossing cylinder, provided with protuberances; a second pressure roller cooperating with said second  
10   embossing cylinder; and if necessary a gluing unit.

#### Prior art

          Embossing units or devices of this type are commonly utilized in the paper converting industry to produce items made of so-called tissue paper, such as rolls of kitchen towels, paper napkins and the like.

15           To increase the volume of the paper product and increase its characteristics of fluid absorption, particularly important in the production of kitchen towels for household use, as well as for aesthetic and commercial purposes, two or more plies of paper material are embossed separately and then joined by applying a glue and laminating them between two cylinders,  
20   which may be the same embossing cylinders used for the embossing operation.

          Embossing consists of mechanical processing in which a ply or a plurality of plies are fed between an embossing cylinder provided with tips or protuberances and a pressure roller if necessary coated in a yielding material,  
25   which presses against the embossing cylinder. The ply or plies are thus mechanically deformed and the paper fibres of which they are constituted are deformed and break. The two or more plies thus embossed are joined to one another by applying a glue on the protuberances obtained by embossing on one of the two plies and by laminating the two or more plies together to exert  
30   the pressure required to make them adhere.

          The embossing devices are characterized, for example, according to the spatial relation between the tips or protuberances produced on the two or more plies joined together. According to a first type of embossing the two plies

- 2 -

are embossed separately by two embossing cylinders, each of which cooperates with a pressure roller. In this way protuberances are produced on each ply; these are then brought to coincide with the each other in tip-to-tip joining. In this case this is called tip-to-tip embossing. An example of a device  
5 of this type is described in EP-A-0370972. The plies are joined together by laminating in the nip between the two embossing cylinders, where the tips or protuberances of one embossing cylinder coincide with the tips or protuberances of the other embossing cylinder.

Variants to this embossing system have been designed to solve  
10 specific problems, for example deriving from the difficulty of making the tips or protuberances of one cylinder coincide with the tips or protuberances of the other when the tips or protuberances are particularly small. Examples of tip-to-tip embossing and laminating devices which constitute a development of the traditional device to solve specific problems are described in US-A-  
15 6,053,232; US-A-6,032,712; US-A-6,245,414; US-A-5,173,351; US-A-6,109,326; US-A-5,736,223; US-A-5,382,464; US-A-4,376,671.

According to a different technique, the plies are again embossed separately, but joined together in a position so that the protuberances produced on one of the two plies fit into in the spaces between the  
20 protuberances of the other ply. In this case this is called nested embossing. For requirements of space and to compensate for bendings of the embossing cylinders during operation, the arrangement of these cylinders in the space varies in tip-to-tip embossing compared to nested embossing.

In this technique the protuberances of the two embossing cylinders are  
25 phased differently to the tip-to-tip embossing technique. The two plies are joined together by lamination between one of the two embossing cylinders and a laminating or joining cylinder.

Systems have been designed to process, on the same machine or on the same device, products using the tip-to-tip technique and using the nested  
30 technique, with particular arrangements to make the device easily convertible from one operating mode to the other. Examples of solutions to obtain this result are described in WO-A-9941064 and in WO-A-9853985.

In addition to technical-functional reasons, embossing is also utilized to

- 3 -

impart particular decorative characteristics on the product. The protuberances produced by embossing may, in fact, be used to reproduce on the product basic decorations with a more or less regular geometrical shape and/or more or less aesthetically elaborate decorative patterns.

5           It is important to be able to replace the embossing cylinders quickly and with reduced machine idle times to modify the design produced on the final product to satisfy different market requirements.

          Ultimately, it may be necessary to replace or adjust the arrangement of the embossing cylinders of an embossing and laminating device in order to  
10       modify both the technical-functional characteristics and the aesthetic characteristics of the final product.

          Replacement of the embossing cylinders, or even simple modification of their layout, for example from tip-to-tip to nested embossing, is a complex and lengthy operation in particular due to the need to perform precise phasing  
15       of the embossing cylinders.

#### Objects and summary of the invention

          The object of the present invention is to produce an embossing and laminating device which allows easy replacement of the embossing cylinders to modify the embossing design and/or the embossing and lamination  
20       technique.

          This and other objects and advantages which shall become clear to those skilled in the art by reading the text hereunder, are in substance obtained with an embossing and laminating device of the type initially mentioned, in which at least the embossing cylinders are carried by an  
25       interchangeable assembly or sub-structure, which can be mounted on and removed from the fixed structure. Preferably, the pressure rollers are carried by the fixed structure, and only the embossing cylinders are carried by the interchangeable assembly. This makes the device simpler and makes the interchangeable assembly quicker to replace.

30       Replacement of the embossing cylinders is made extremely simple and quick. It is possible to have two or more interchangeable assemblies which differ for example in the configuration of the embossing cylinders (tip-to-tip on one assembly and nested on another), or in the different conformation of the

- 4 -

tips or protuberances, for example to produce different designs. In contrast, in the preferred embodiment of the invention, the pressure rollers remain on the fixed structure so that a single pair of pressure rollers is used for the embossing cylinders of one or more interchangeable assemblies. In this way it is also extremely simple to replace the interchangeable assembly, as all the actuators and relative pneumatic or hydraulic supply lines remain attached to the fixed structure.

By positioning the embossing cylinders on an interchangeable assembly it is possible to match the phase of the cylinders during initial assembly of the assembly, so that during subsequent replacement of the interchangeable assemblies the phases of the cylinders do not require to be matched, consequently simplifying the operations to replace the interchangeable assembly.

When the interchangeable assembly has embossing cylinders arranged in a nested or equivalent configuration, a laminating roller, cooperating with one of the embossing cylinders, may advantageously be mounted on the same interchangeable assembly.

Advantageously, again for the purpose of simplifying operations to replace one assembly with another, it is possible for the interchangeable assembly also to have the transmission of motion from one embossing cylinder to the other. Transmission may for example be obtained by a pair of toothed wheels aligned with the cylinders and immersed in an oil bath. In this case the user does not require to perform any operation on the mechanical transmission between the embossing cylinders during replacement of one interchangeable assembly with another. Transmission of motion from the fixed part of the device to the interchangeable assembly may advantageously take place with a system that allows quick removal and mounting of the interchangeable assembly, for example by a toothed belt transmission.

Further advantageous characteristics and embodiments of the invention are set forth in the attached claims.

#### Brief description of the drawings

The invention shall now be better understood by following the description and attached drawing, which shows a non-limiting practical

- 5 -

embodiment of the invention. In the drawing, in which identical parts are indicated with the same reference numbers:

Fig.1 shows a schematic side view of the embossing and laminating device provided with a first interchangeable assembly of embossing cylinders;

5 Fig.2 shows an analogous view to the one in Fig.1, with the interchangeable assembly separated;

Fig.3 shows a side view analogous to the view in Fig.1, with a different embossing cylinder assembly mounted on the device;

10 Fig.4 shows a side view of the device and the interchangeable assembly in Fig.3 separated from the embossing and laminating device;

Fig.5 shows a schematic side view of a different embodiment of the device; and

15 Figs.6 and 7 show two very schematic plan views of a device according to the invention and of track means for transferring and replacing interchangeable assemblies.

#### Detailed description of the preferred embodiment of the invention

20 Figs.1 and 2 show a first configuration of the device according to the invention. The number 1 generically indicates the device as a whole. This comprises a fixed supporting structure 3, comprising a pair of sides parallel with each other, one of which can be seen in the drawing, the other being substantially identical. A gluing unit, generically indicated with 5 and per se known, is mounted on the fixed supporting structure 3. The gluing unit 5 is positioned on one side of a substantially vertically extending portion 3A of the supporting structure 3, while on the opposite side of said portion 3A is an  
25 interchangeable assembly generically indicated with 7, carrying a first embossing cylinder 9 and a second embossing cylinder 11.

30 The interchangeable assembly 7 comprises a pair of parallel sides 13, which are fixed to the sides of the fixed supporting structure 3 and one of which can be seen in the drawing, the other being substantially identical. In the example shown the sides 13 are fixed to the respective sides of the fixed supporting structure 3 by screw means 15. However, it must be understood that other systems may also be used, such as systems with pneumatic or hydraulic actuators to obtain quicker clamping of the interchangeable

- 6 -

assembly 7.

The first embossing cylinder 9 is supported in a fixed position on the interchangeable assembly 7 by supports which are positioned at a projecting portion 13A of the sides 13. In this way in the mounted layout the axle 9A of the first embossing cylinder 9 is aligned with slots 3B (Fig.2) produced in the vertically extending portion 3A of the fixed supporting structure 3. The embossing cylinder 9 is provided on its cylindrical surface with protuberances or tips 9P used to emboss the ply of web material fed to it in the way described hereunder.

The second embossing cylinder 11 is supported by a pair of oscillating arms 17 hinged in 19 to the sides 13 of the interchangeable assembly 7, for the purposes described hereunder. The second embossing cylinder 11 is also provided on its cylindrical surface with tips or protuberances 11P. The protuberances 11P and 9P of the two embossing cylinders 9 and 11 are in phase with each other and the reciprocal distance of the two cylinders is such that the protuberances of one cylinder are aligned with the protuberances of the other and are pressed against each other in the lamination nip between the two cylinders, indicated with 10.

A first and a second pressure roller, indicated with 21 and 23 respectively, are mounted on the fixed supporting structure 3. The first pressure roller 21 is supported by a pair of oscillating arms 25 hinged in 27 to the fixed supporting structure 3 and cooperates with the first embossing cylinder 9, while the second pressure roller 23 is carried by a pair of oscillating arms 29 hinged in 31 to the fixed supporting structure 3.

A pair of piston-cylinder actuators 33 press the first pressure roller 21 against the first embossing cylinder 9, while a second pair of piston-cylinder actuators 35 press the second pressure roller 23 against the second embossing cylinder 11.

A third pair of piston-cylinder actuators 37 press the pair of oscillating arms 17 and therefore the second embossing cylinder 11 supported by them against the first embossing cylinder 9.

The first embossing cylinder 9 is drawn in rotation by a central motor 39 or by a transmission the motion of which derives from a different source of



- 7 -

motion associated with the line in which the device 1 is fitted. The motion is then transmitted by a belt 41 to the first embossing cylinder 9, keyed on the axle of which is a toothed wheel (not shown), which meshes with a second toothed wheel (again not shown) keyed on the axle of the second embossing cylinder 11, so that the sole motor 39 mounted on the fixed supporting structure 3 carries the two embossing cylinders in rotation. Another belt transmission or equivalent, per se known, may transmit motion to the pressure rollers 21, 23. Alternatively, these may be drawn in rotation by contact with the embossing cylinders 9 and 11. Along the extension of the path of the belt 41 is a tensioning roller 45 adjustable, for example, by a pneumatic actuator. This allows the belt 41 to be loosened or tightened quickly and the interchangeable assembly 7 to be removed or mounted easily.

The diagram in Fig.1 also shows the paths of two plies V1 and V2 of web material, which are embossed between the pressure roller 21 and the embossing cylinder 9 and between the pressure roller 23 and the embossing cylinder 11 respectively. When the interchangeable assembly 7 is mounted, the pressure rollers 21 and 23 are pressed against the respective embossing cylinders 9, 11, while the latter are pressed against each other at the lamination nip 10. The gluing unit 5 cooperates with the first embossing cylinder 9. In this way the two plies V1 and V2 are embossed and subsequently laminated together in the nip 10, after the glue delivered from the gluing unit 5 has been applied to protuberances produced by the protuberances 9P.

When it is necessary to replace the embossing cylinders 9 and 11, for example to replace them with an assembly that allows nested embossing rather than tip-to-tip embossing, or to replace the cylinders with others provided with protuberances 9P, 11P reproducing a different design, it is sufficient to remove the interchangeable assembly 7 and replace it with another. Fig.2 shows, separately after removal, the interchangeable assembly 7 and the fixed supporting structure 3 with the mechanical parts which remain mounted on it. The embossing cylinders 9 and 11 remain on the interchangeable assembly 7 and are in phase with each other. Therefore, at the subsequent replacement the assembly can be remounted without

- 8 -

requiring any adjustment or reciprocal phasing of the embossing cylinders. Analogously, the embossing cylinders of the other interchangeable assemblies will be in phase with each other. The toothed wheels that transmit motion from one of the two embossing cylinders 9, 11 to the other may be in  
5 an oil bath and therefore require no connection to external lubrication systems. Belt transmission 41 with the adjustable tensioning roller 45 allows easy removal of the assembly 7.

Figs. 3 and 4 show the same embossing and laminating device 1, with a different interchangeable assembly, again indicated with 7. Identical  
10 numbers indicate parts identical or equivalent to those in Figs. 1 and 2.

The difference compared to the previous example is found in the configuration of the interchangeable assembly 7. In this case this is no longer a tip-to-tip assembly, as in the previous case, but an assembly for nested  
15 embossing. The protuberances 9P, 11P of the two embossing cylinders 9 and 11 are arranged so that the protuberances of one cylinder correspond with the empty spaces between the protuberances of the other cylinder. Consequently, the protuberances produced in one ply will be positioned between the protuberances of the other. In the nip 10, which is no longer a lamination nip, there is no reciprocal contact between the embossing cylinders 9 and 11.  
20 Lamination between the two plies occurs between the first embossing cylinder 9 and a laminating roller 12, also carried by the interchangeable assembly 7. The laminating roller 12 is carried by a pair of oscillating arms 14 which may be integral with the oscillating arms 17 which carry the second embossing cylinder 11. Alternatively, the arms 14 may oscillate separately from the arms  
25 17 and be provided with their own actuators (not shown).

As can be seen by comparing Figs.1 and 3, the two interchangeable assemblies 7 shown in the two figures may replace each other. The pressure rollers 21, 23 easily adapt to the different configuration and arrangement of the embossing cylinders 9 and 11. In particular, the position of the second  
30 pressure roller 23 may be adapted to the different position of the second embossing cylinder 11 in the two cases simply by an increased or decreased oscillation of the supporting arms 29.

Fig.5 schematically shows an embodiment in which the

- 9 -

interchangeable assembly, indicated again with 7, houses not only the embossing cylinders 9, 11 but also the pressure rollers 21 and 23 and the relative actuators. This configuration is more complex than the previous one, as replacement of the interchangeable assembly implies the need to  
5 disconnect and reconnect the electric and hydraulic (or pneumatic) supply lines of the actuators. Nonetheless, there is still the advantage of easier maintenance and elimination of the need to match the phase of the embossing cylinders, as in the previous case.

The interchangeable assemblies 7 may be moved with a bridge crane.  
10 Nonetheless, to further facilitate replacement of one assembly with another, tracks or other guiding devices may be provided along which the interchangeable assemblies may be made to slide.

Fig.6 schematically shows a configuration in which guide components parallel to the axes of the embossing cylinders allow two interchangeable  
15 assemblies 7A, 7B to be fitted and removed easily. In the layout shown in the figure the assembly 7A is fitted, while the assembly 7B is standing by at one side of the device. Replacement is obtained by translating the assembly 7A in the direction of the arrow A after having released it, to replace it with the assembly 7B which is fitted in the direction of the arrow B.

20 In the solution in Fig.7 a long track is positioned only on one side of the device on which several interchangeable assemblies 7X, 7Y, 7Z are positioned, while an assembly 7" is in the operating position. Replacement takes place by translating the assemblies along the double arrow f1 and along the double arrow f2.

25 It is understood that the drawing shows only a practical embodiment of the invention, the forms and arrangements of which may vary without however departing from the scope of the concept underlying the invention. Any reference numerals in the attached claims are provided only to facilitate reading of the claims in the light of the description hereinbefore and the  
30 attached drawings and do not limit the scope of protection.

- 10 -

CLAIMS

1. An embossing and laminating device for embossing and joining together plies of web material, comprising: a supporting structure (3); a first embossing cylinder (9) provided with protuberances (9P); a first pressure roller (21) cooperating with said first embossing cylinder (3); a second embossing cylinder (11), provided with protuberances (11P); a second pressure roller (23) cooperating with said second embossing cylinder (11); characterized in that at least said first and said second embossing cylinder (9, 11) are carried by an interchangeable assembly or sub-structure (7), which can be mounted on and removed from the fixed structure.
2. Device as claimed in claim 1, characterized in that said first and said second embossing cylinder (9, 11) are carried by said interchangeable assembly, while said first and said second pressure roller (21, 23) are carried by the fixed structure.
3. Device as claimed in claim 2, characterized in that actuator members (33, 35) are positioned on said fixed structure to press the pressure rollers against the embossing cylinders.
4. Device as claimed in claim 1, 2 or 3, characterized in that said first and said second embossing cylinder are positioned on said interchangeable assembly in phase with each other.
5. Device as claimed in claim 4, characterized in that said first and said second embossing cylinder are phased so that the respective protuberances are arranged in a tip-to-tip configuration.
6. Device as claimed in claim 4, characterized in that said first and said second embossing cylinder are phased so that the respective protuberances are in a nested configuration.
7. Device as claimed in claim 6, characterized in that a laminating roller (12) is mounted on said interchangeable assembly, cooperating with said first or second embossing cylinder.
8. Device as claimed in one or more of the previous claims, characterized in that said interchangeable assembly carries means to transmit motion from the first to the second embossing cylinder.
9. Device as claimed in claim 8, characterized in that said means

- 11 -

to transmit motion from the first to the second embossing cylinder comprise a pair of gears keyed on the axles of the first and of the second embossing cylinder.

10. Device as claimed in claim 9, characterized in that said gears  
5 are immersed in an oil bath.

11. Device as claimed in one or more of the previous claims, characterized in that said supporting structure comprises a kinematic transmission (41) of movement from a source of motion (39) to said first or second embossing cylinder.

10 12. Device as claimed in claim 11, characterized in that said kinematic transmission comprises a motorized wheel and a belt (41) to transmit motion to said first or second embossing cylinder.

13. Device as claimed in one or more of the previous claims, characterized in that said supporting structure (3) comprises two sides with  
15 substantially vertically extending portions, in which slots (3B) are provided, inside which corresponding portions (13A) of sides (13) of said interchangeable assembly (7) are inserted, the axle (9A) of the first embossing cylinder being positioned inside said slots when the interchangeable assembly is mounted on the supporting structure.

20 14. Device as claimed in claims 11 and 13, characterized in that said kinematic transmission transmits motion to said first embossing cylinder.

15. Device as claimed in at least claim 13 or 14, characterized in that on the opposite side of said vertically extending portions from said interchangeable assembly said structure carries a gluing unit (5), cooperating  
25 with said first embossing cylinder.

16. Device as claimed in one or more of the previous claims, characterized in that at least one of said first and second pressure roller is supported by a pair of arms (25; 29) oscillating around an axis (27; 31) fixed in relation to said supporting structure (3) to adopt at least two different  
30 operating positions.

17. Device as claimed in claim 16, characterized in that said pressure roller supported in such as way as to adopt at least two operating positions is the second pressure roller.

- 12 -

18. Device as claimed in one or more of the previous claims, characterized in that one of said first and second embossing cylinder is supported on said interchangeable assembly by arms (17) oscillating around an axis (19) fixed in relation to said interchangeable assembly.

5        19. Device as claimed in claim 18, characterized in that when the interchangeable assembly is mounted on the supporting structure, said oscillating arms (17) carrying the embossing cylinder cooperate with at least an actuator (37) which presses said first and said second embossing cylinder against each other.

10       20. Device as claimed in one or more of the previous claims, characterized in that it comprises means for quickly clamping said interchangeable assembly on said supporting structure.


15       21. Device as claimed in one or more of the previous claims, characterized in that it comprises at least two interchangeable assemblies differing from each other.

22. Device as claimed in one or more of the previous claims, characterized in that said interchangeable assembly or assemblies are movable on guides to be translated towards or away from said fixed structure.


20       23. Device as claimed in one or more of the previous claims, characterized in that a gluing unit (5) is mounted on said supporting structure.

1 / 6

Fig.1

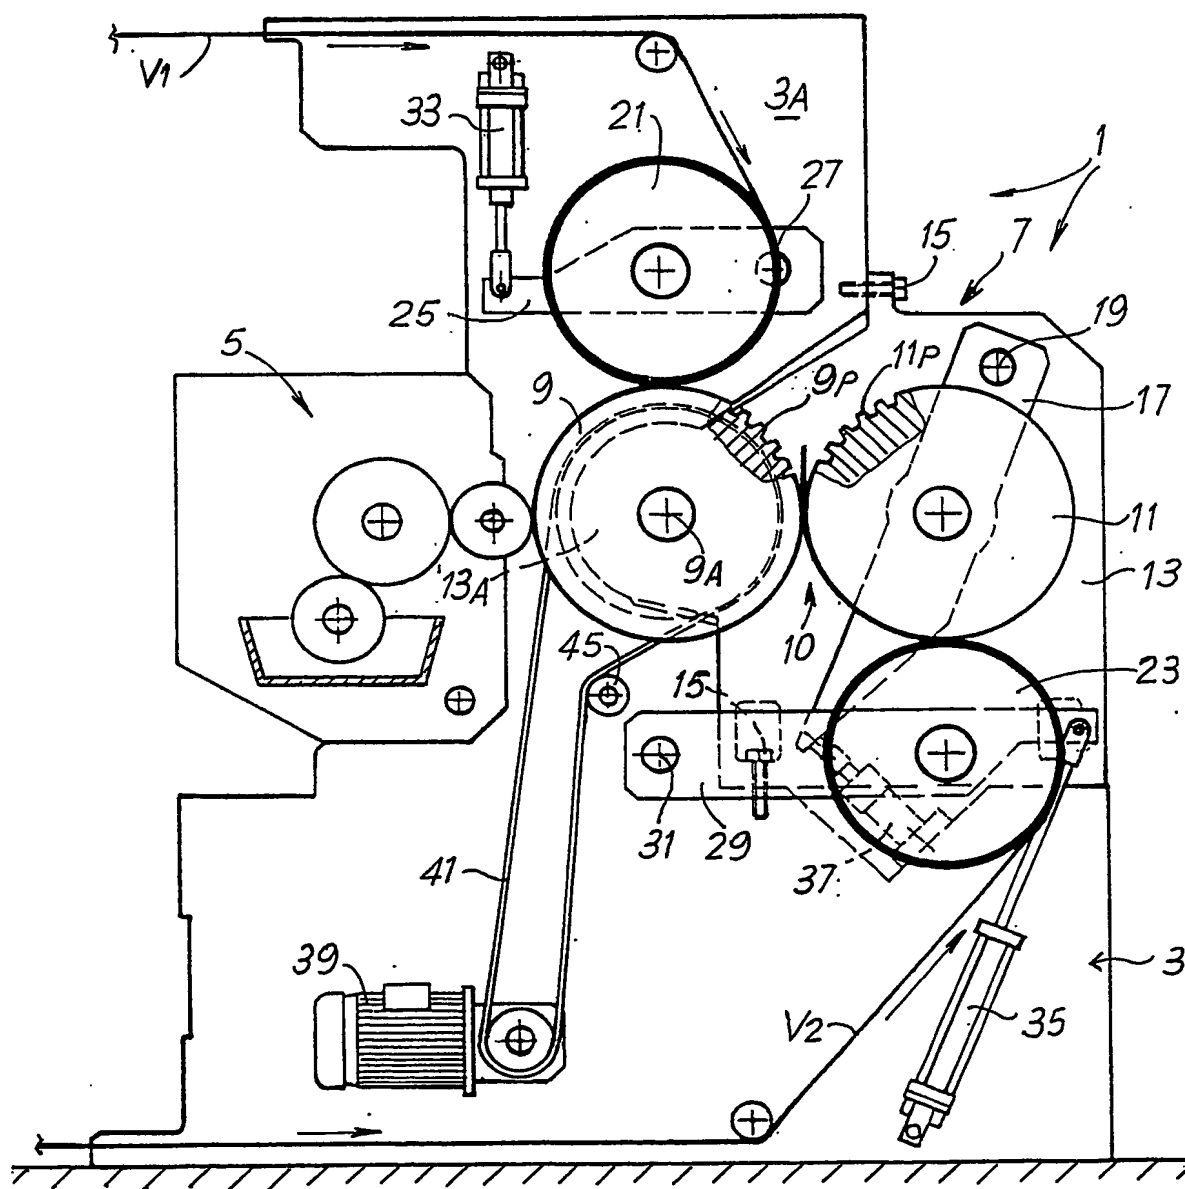


2 / 6

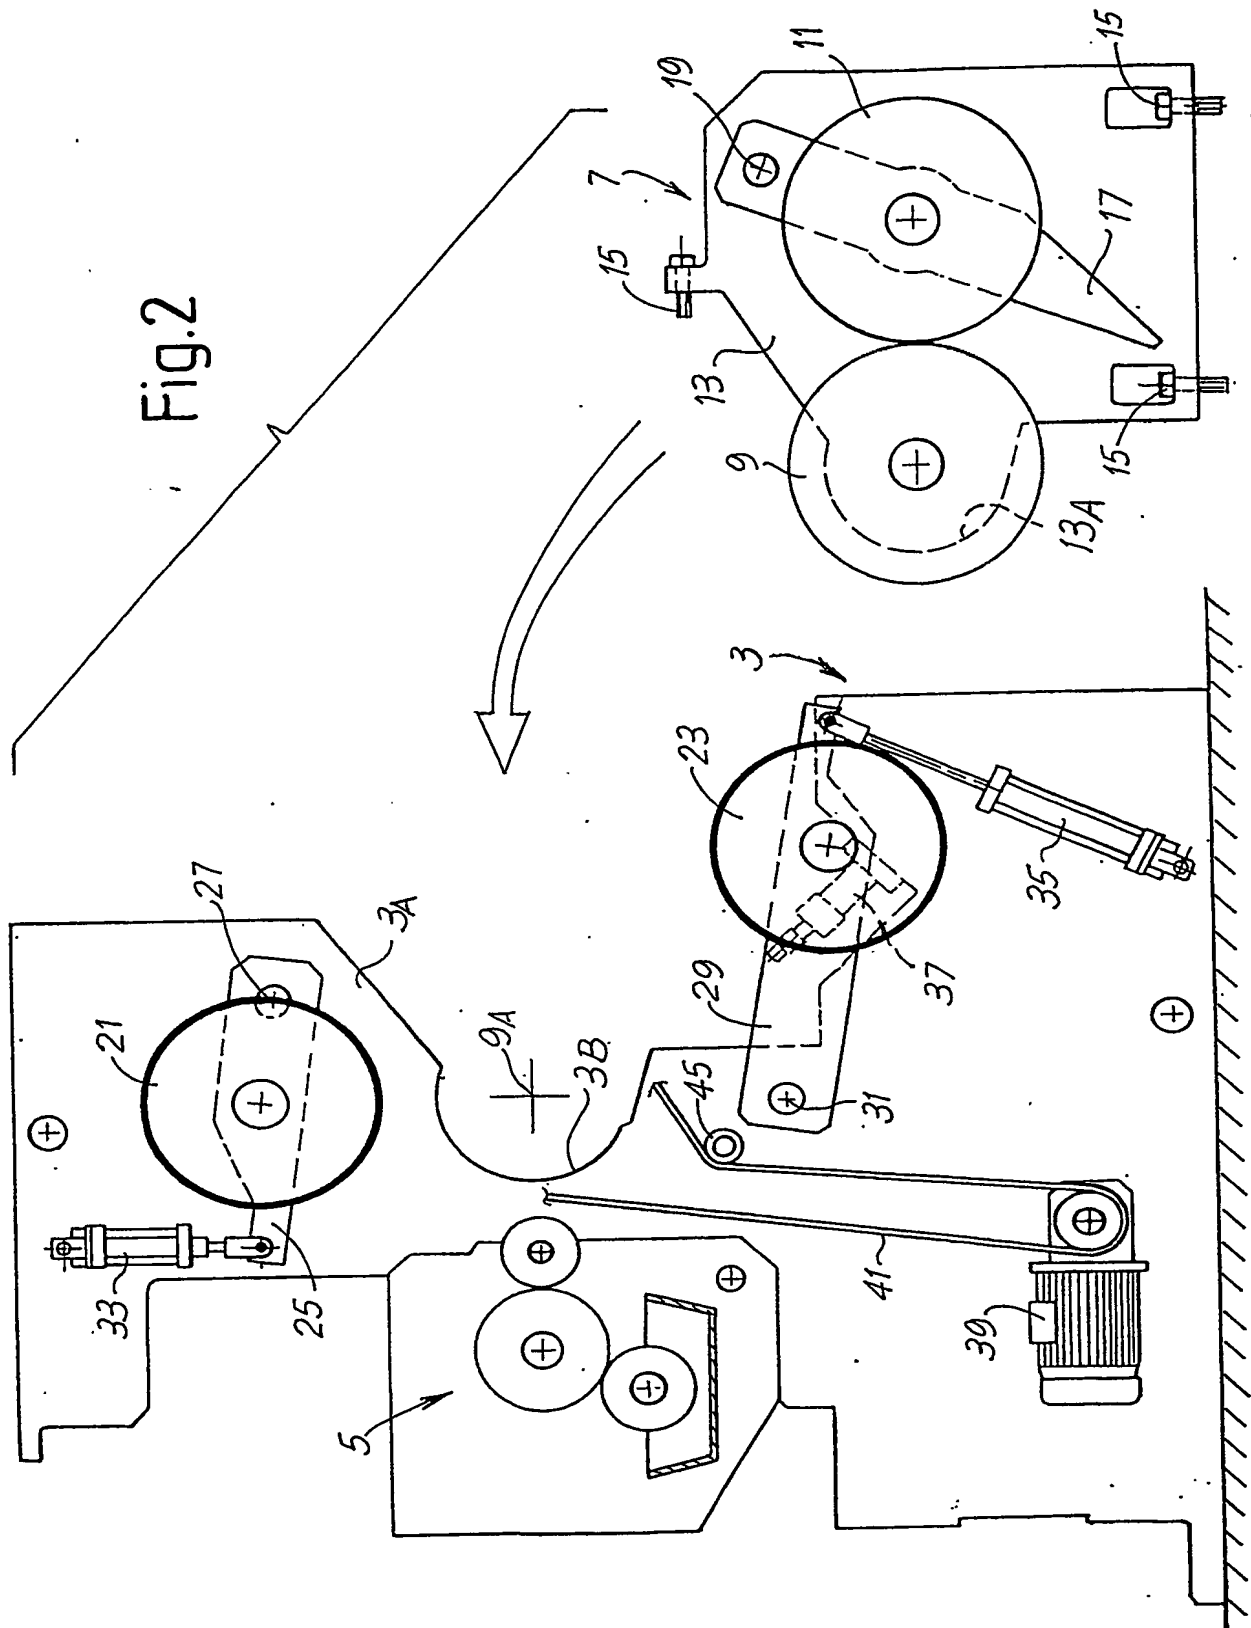




3 / 6

Fig.3

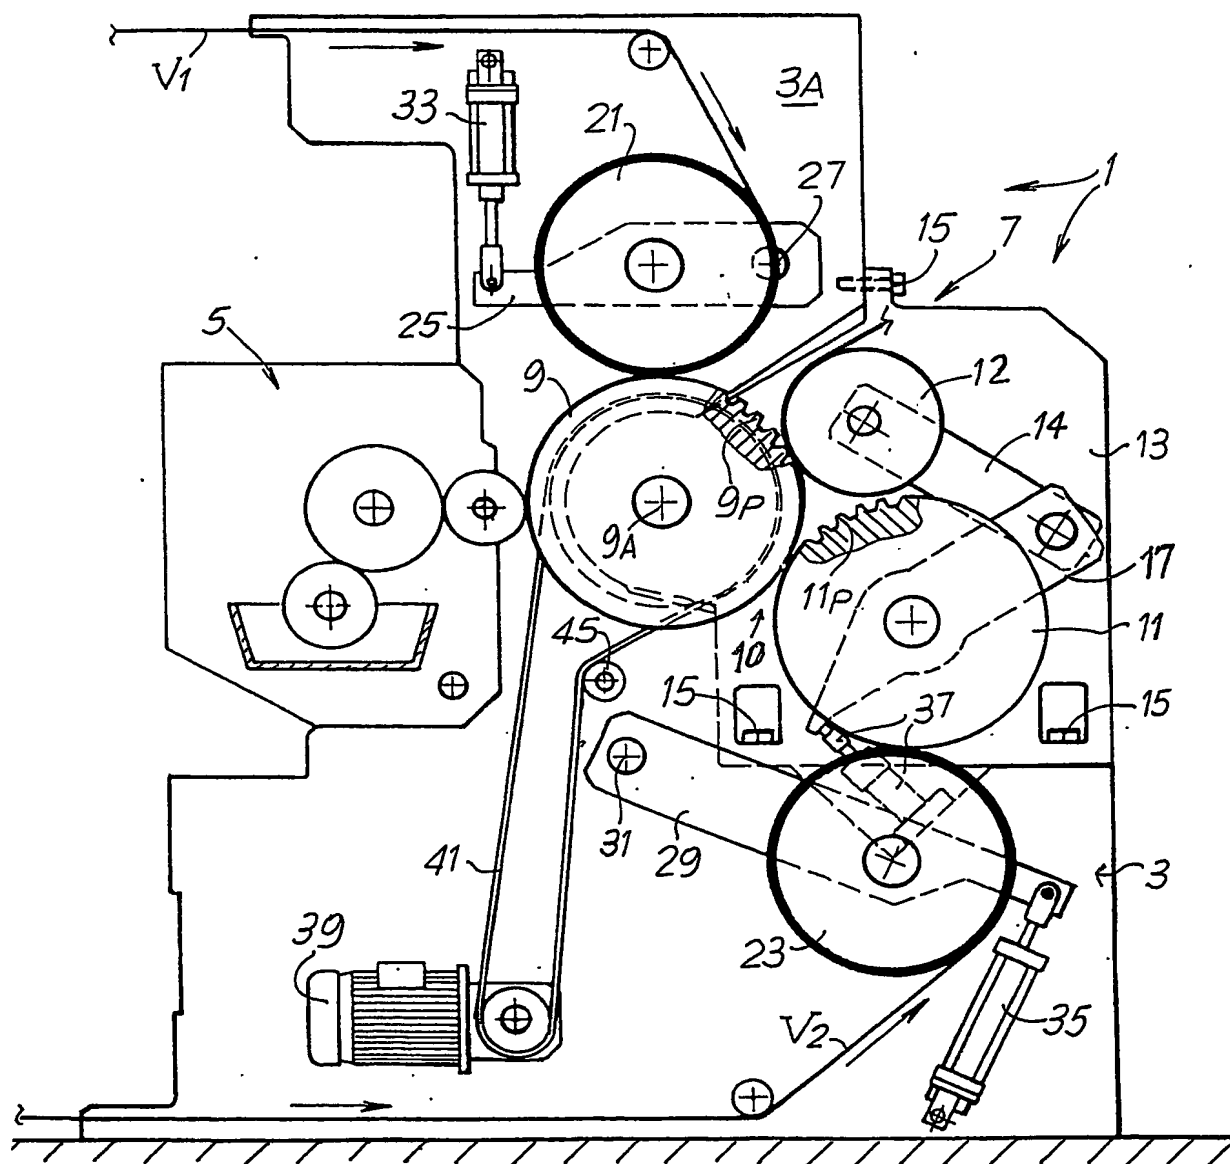


4 / 6

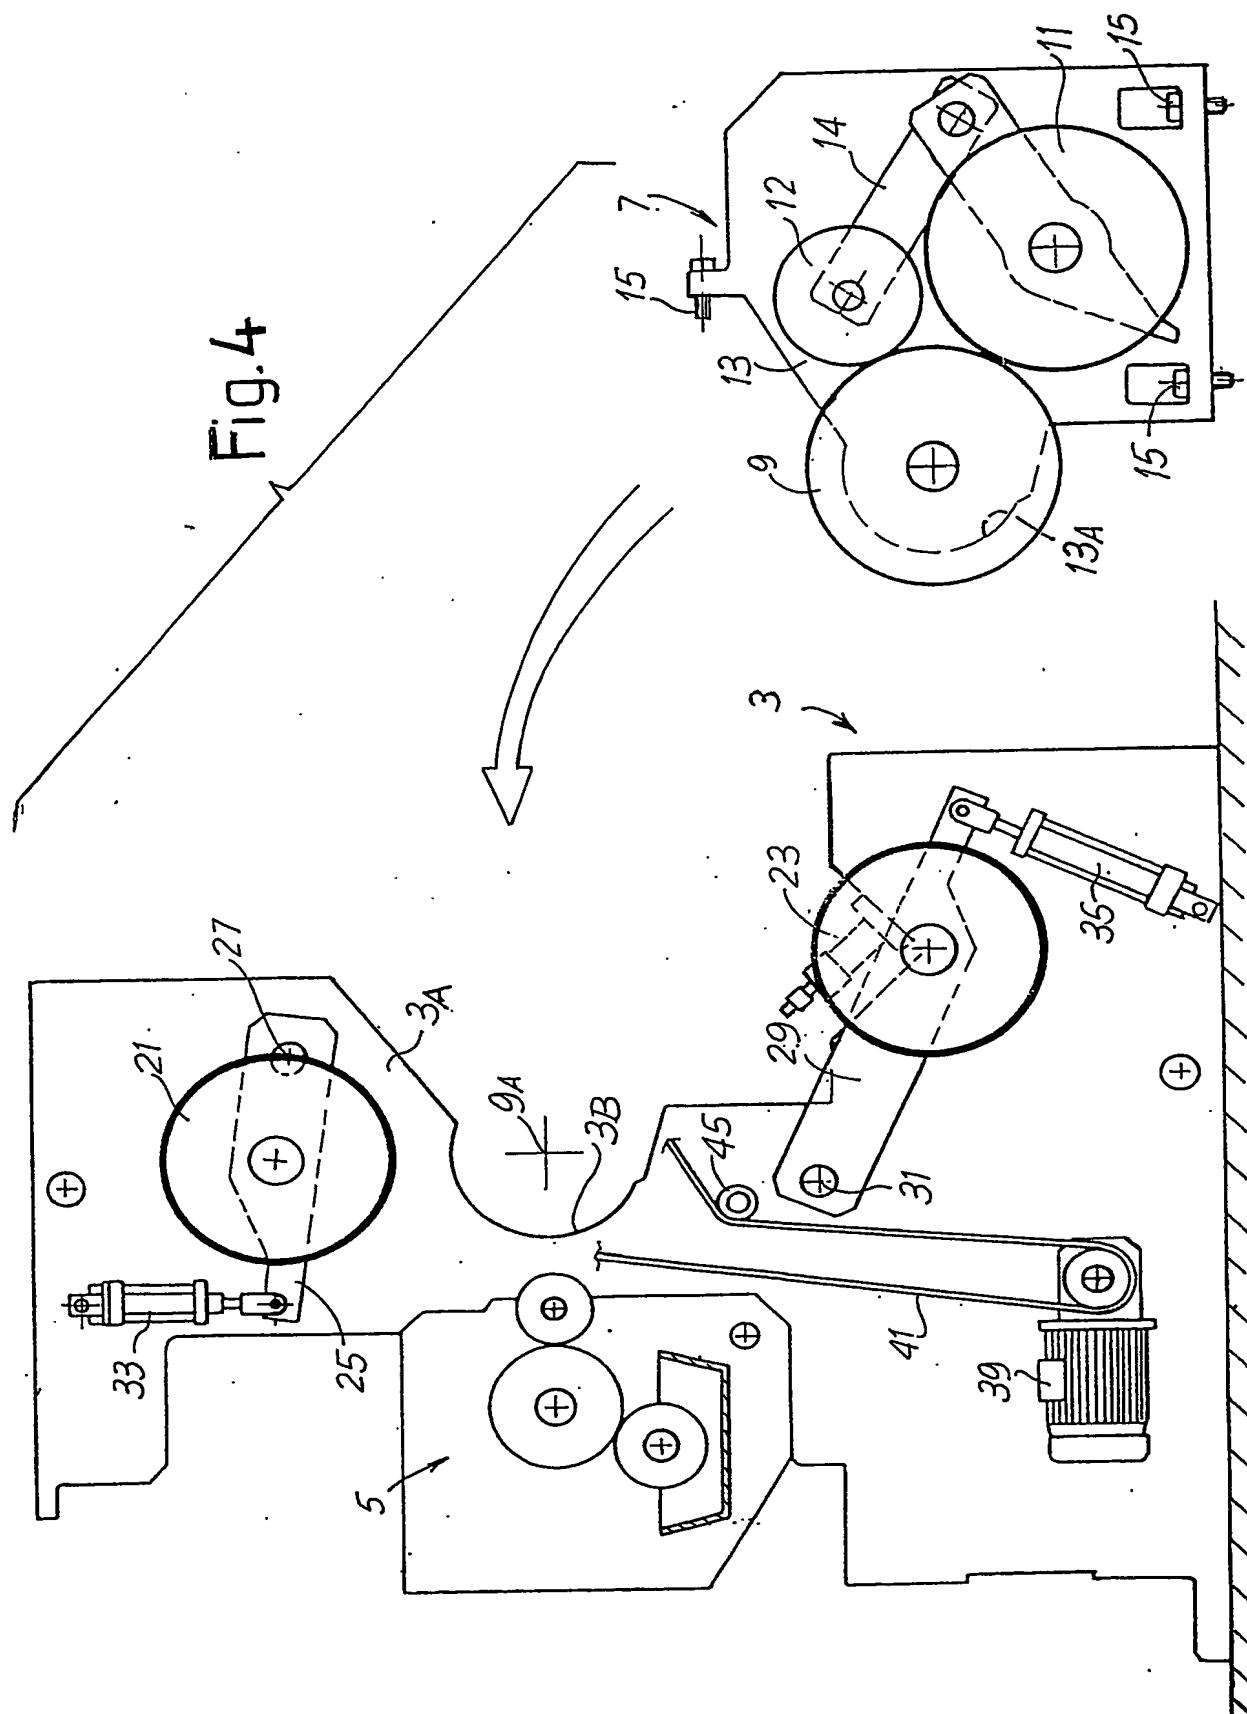

5 / 6

Fig.5

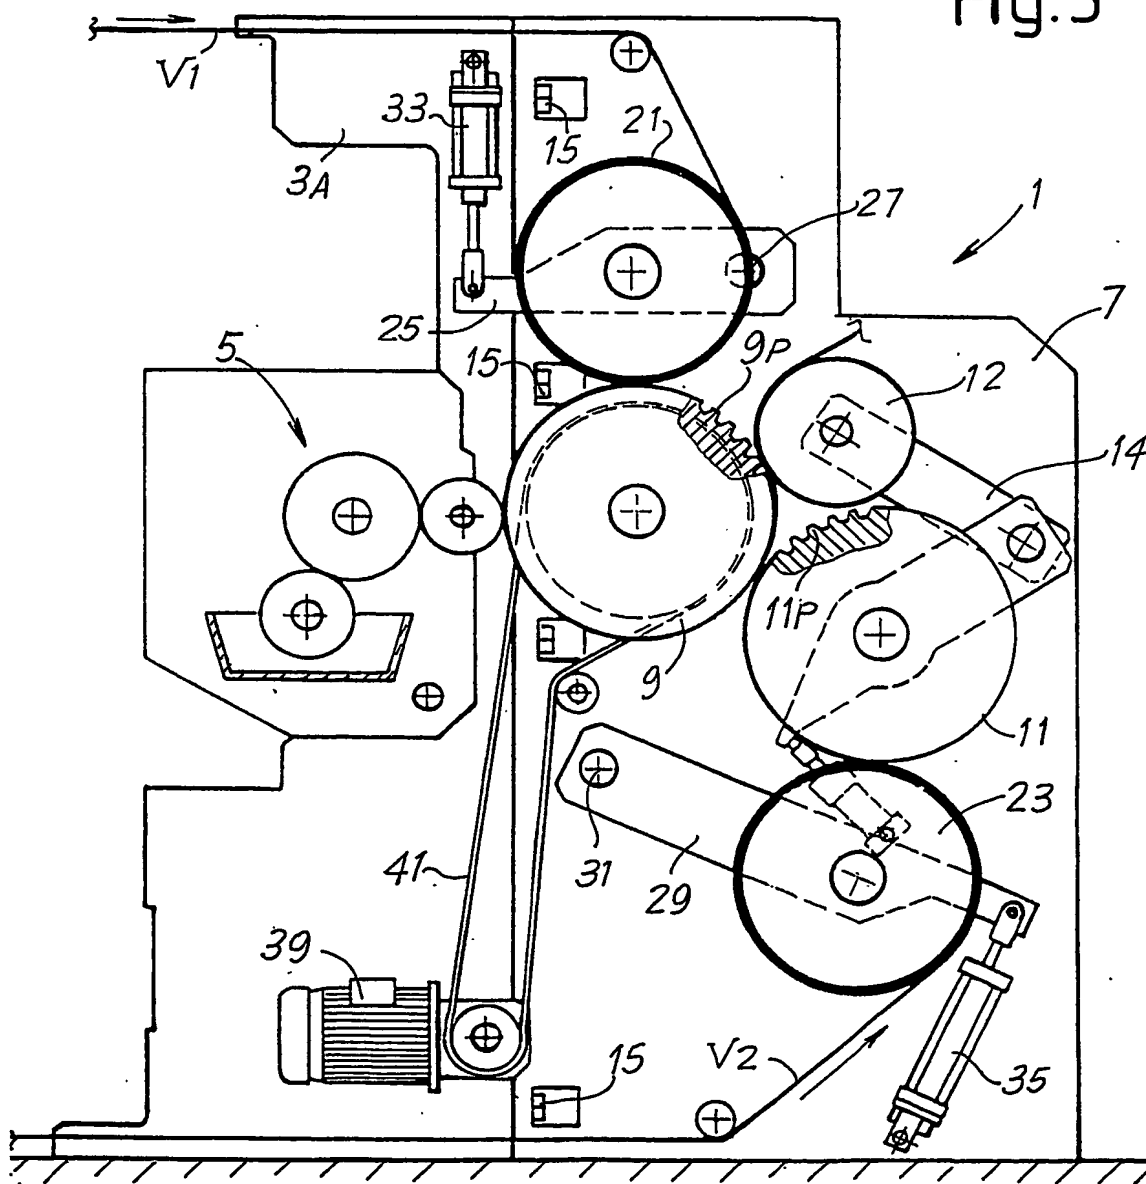

6 / 6

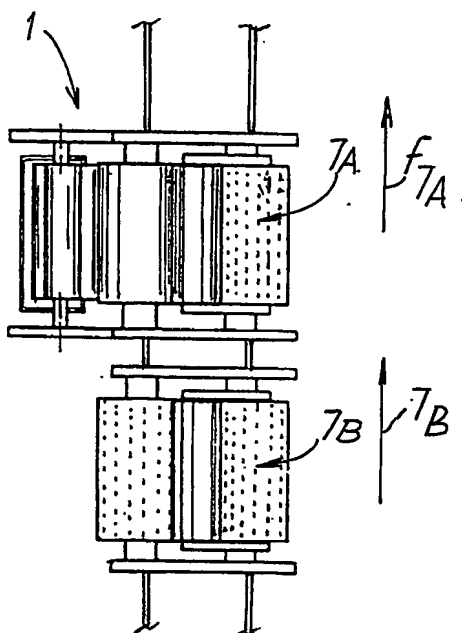


Fig. 6

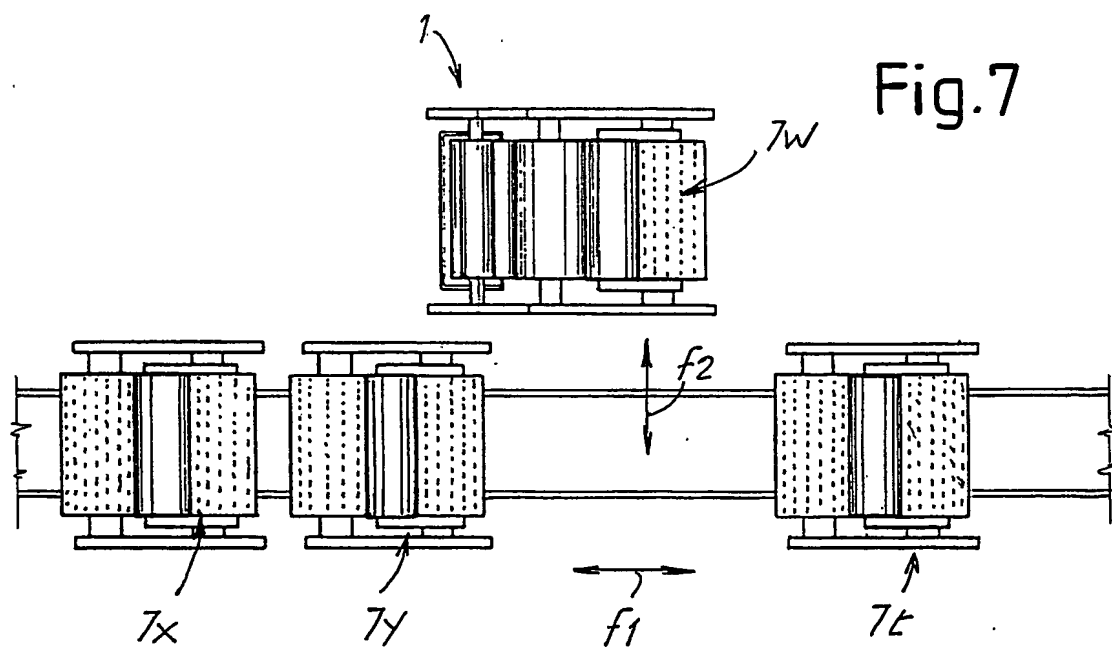


Fig. 7

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00377

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B31F1/07

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B31F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	GB 2 373 482 A (FIN OMET S R L) 25 September 2002 (2002-09-25) abstract; claims; figures ---	1-23
A	EP 0 980 751 A (PAPER CONVERTING MACHINE CO) 23 February 2000 (2000-02-23) cited in the application abstract; claims; figures ---	1-23
X	WO 00 56475 A (BOEGLI GRAVURES S A) 28 September 2000 (2000-09-28) abstract; claims; figures ---	1
X	US 4 732 082 A (IRETON CARL) 22 March 1988 (1988-03-22) abstract; claims; figures ---	1
-/--		

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

13 October 2003

Date of mailing of the international search report

20/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax (+31-70) 340-3016

Authorized officer

J-E. Söderberg

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00377

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 176 287 B1 (WEBER MANFRED) 23 January 2001 (2001-01-23) ---	
A	EP 0 370 972 A (PERINI FINANZIARIA SPA) 30 May 1990 (1990-05-30) cited in the application -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 03/00377

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2373482	A	25-09-2002	IT MI20010566 A1	19-09-2002
EP 0980751	A	23-02-2000	US 6109326 A	29-08-2000
			DE 980751 T1	20-03-2003
			EP 0980751 A1	23-02-2000
			JP 2000062053 A	29-02-2000
WO 0056475	A	28-09-2000	EP 1048369 A1	02-11-2000
			AT 238851 T	15-05-2003
			AU 3430200 A	09-10-2000
			BR 0009191 A	18-12-2001
			CA 2367423 A1	28-09-2000
			CN 1267595 A	27-09-2000
			DE 50001966 D1	05-06-2003
			DK 1163061 T3	21-07-2003
			WO 0056475 A1	28-09-2000
			EP 1163061 A1	19-12-2001
			JP 2002539966 T	26-11-2002
			ZA 200107352 A	05-12-2002
US 4732082	A	22-03-1988	NONE	
US 6176287	B1	23-01-2001	FR 2773515 A1	16-07-1999
			EP 0928682 A1	14-07-1999
EP 0370972	A	30-05-1990	IT 1225324 B	06-11-1990
			AT 82191 T	15-11-1992
			BR 8905915 A	19-06-1990
			CA 2003276 A1	23-05-1990
			DE 68903472 D1	17-12-1992
			DE 68903472 T3	22-10-1998
			EP 0370972 A1	30-05-1990
			ES 2036055 T3	01-05-1993
			GR 3006871 T3	30-06-1993
			GR 3026628 T3	31-07-1998
			JP 1892587 C	26-12-1994
			JP 2182444 A	17-07-1990
			JP 6013198 B	23-02-1994
			KR 9410352 B1	22-10-1994
			US 5096527 A	17-03-1992